



PRODUCT DATA


No-Warp[®] Foam

Window & Door Insulating Sealant



This is a one-component polyurethane foam specially formulated to seal around window and door frames. The low pressure, airtight insulation foam blocks drafts, moisture and insects without bowing.

- **Will not warp frames or jambs**
- **Exerts up to 90% less curing pressure than other foams**
- **For professional gun applications**
- **Provides water-resistant, airtight seal**
- **Bright white**
- **Handles up to 12 average windows**
(36 inch x 60 inch; 3/8 inch gap, 1 inch deep)



**Conforms
to: 812-04**





No Warp

Polyurethane Foam Sealant

TECHNICAL DATA


- Density: 1.3-1.8 lbs./cu.ft.
- Thermal Resistance: (ASTM C-518)
R-Value 4.5 per inch thickness
- Maximum Service Temperature of Cured Foam: 240°F (116°C)
- Shelf Life: 18 months
- No CFC's, No HCFC's
- Contains no urea formaldehyde
- Safe for wood, aluminum, vinyl and window/door installs



YIELD ESTIMATE TABLE

Size(Volume)	Bead Diameter	Linear Feet
20 oz. can	1/4"	2096
	3/8"	932

ASTM C-1536

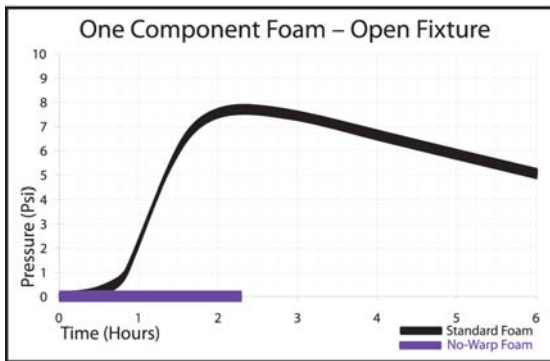

also available



Poly-Clean

Polyurethane Foam Cleaner

- Removes wet foam from hands, tools and foam applicator guns
- Trilingual label (English, Spanish, French)



Remove adapter and attach to top of can for easy use.



Spray cleaner directly on top of gun for foam removal.



Attach can to gun basket to remove foam from gun barrel.

DIRECTIONS

Read all directions and cautions before use. For additional information, see package label or MSDS.

- **SURFACE PREP:** Surface should be free of dirt, oil, grease and excess moisture.
- **SET-UP:** Attach applicator gun to can (do not overtighten), then shake well for 30 seconds.
- **APPLICATION:** Dispense foam with can upside down, testing bead size on scrap material first. Fill area about 25% full, leaving room for foam to expand. Note: To improve curing in arid regions, spray a light water mist into the cavity before applying foam.
- **STORE UPRIGHT (50°-100°F)**
- **FOAM BONDS TO SKIN QUICKLY.** Wear gloves, eye protection and work clothes; use drop cloths.
- **FOR BEST RESULTS** use in temperatures 60° - 100° F (50% relative humidity).
- **FINISH:** Foam will be tack-free in about 10 minutes (50% RH). Excess can be trimmed in about 30 minutes. Cover or paint foam surfaces exposed to direct sunlight.
- **CAN CHANGEOVER:** Once started, do not remove gun until can is empty; then purge gun and remove can. Clean gun basket with acetone or polyurethane foam cleaner. Immediately attach fresh can to prevent foam from hardening in gun.



UNDERWRITERS LABORATORIES INC.
CLASSIFIED CAULKING AND SEALANTS
 Surface Burning Characteristics
 Applied To Inorganic Reinforced Cement Board*
Flame Spread 10 Smoke Developed 15

R14175
IL15

*Tested as applied in four 1/2 in. diameter beads, 5 inches on center, covering 8.3% of the exposed test sample area. The test results do not reflect the hazards of this material under actual fire conditions.

CAUTION: Contains MDI Monomer, Polyurethane Resin & Propane / Isobutane. Cured foam exposed to temperatures in excess of 240°F (116°C) may release hazardous decomposition products. Keep away from heat, sparks, flames and static electricity. Turn off sources of ignition (pilot light, etc.). Ventilate work area with moving, fresh air. Vapors heavier than air may cause flash fire or ignite explosively. Do not puncture, expose to heat or store at temperatures above 120°F (49°C). Do not leave in auto. Wear protective gloves, safety glasses, work clothes.

FIRST AID TREATMENT - SKIN CONTACT: DO NOT RINSE WITH WATER (water helps curing). If foam is wet: remove immediately with acetone or polyurethane foam cleaner. After removal, wash with soap and water. If foam has dried: it is very difficult to remove. Do not try to remove with solvents. Cured foam wears off and is not harmful to health. **EYE CONTACT:** Flush with water for 15 minutes and get immediate medical attention. **INHALATION:** Overexposure to vapors may cause dizziness or headache – move to fresh air. Consult physician if needed. **INGESTION:** Get immediate medical attention. **KEEP OUT OF REACH OF CHILDREN.**

Product	Item #	Case Pack	Unit UPC Code	Master Carton	Case Weight	Pallet Qty.
No-Warp Foam	4004529712	12 / 20 oz.	0 75650 29712 4	1 00 75650 29712 4	20.24	72
Poly-Clean (US/Canada)	4004712022	12 / 12 oz.	0 75650 00015 1	1 00 75650 00015 8	13	108



Convenience products

866 Horan Dr., Fenton, MO 63026-2416 USA
1-800-325-6180 • www.touch-n-seal.com