



Low-E[®] INSULATION HVAC

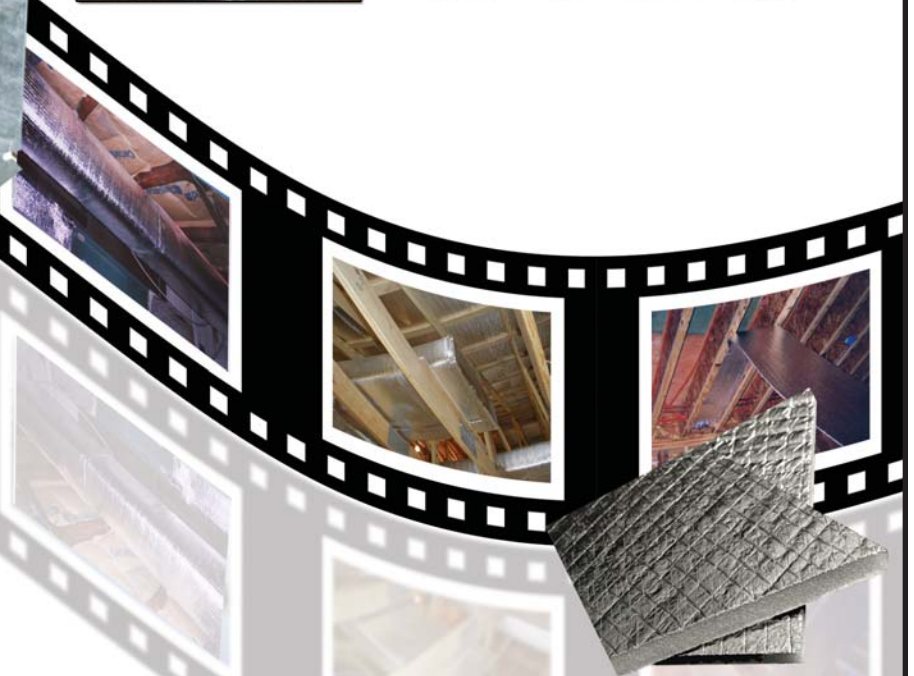

Low-E HVAC is constructed of 1/4" polyethylene foam faced on both sides with durable 99.4% pure aluminum. Used mainly as a duct wrap this product has many benefits for both the installer and the homeowner versus typical duct wraps. It stops up to 97% of radiant heat transfer, absorbs absolutely no moisture, won't mildew or deteriorate and it's totally non-toxic. This results in a clean, hypo-allergenic duct wrap free of fibers. Best of all, for the installer, it is lightweight, cuts with a razor knife, and there's NO ITCH! Give it a try and find out for yourself. See why Low-E HVAC Insulation is "the most versatile HVAC insulation on the market today"

Members of the following Organizations:

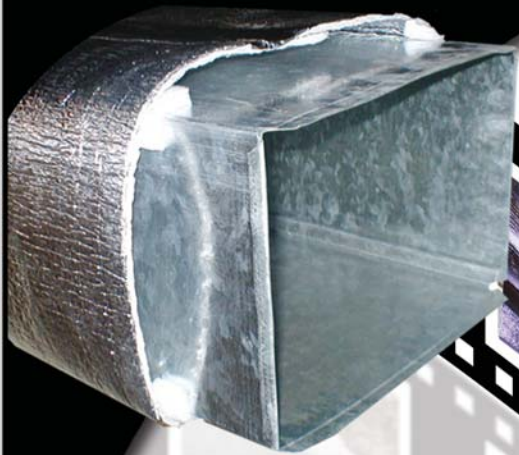

Benefits of ESP Low-E[®] HVAC Insulation:

- Saves time and money
- Non-toxic, no fiberglass - no itching
- Stops up to 97% of radiant heat transfer
- Installs easily with razor knife and foil tape
 - Class A/Class 1 Fire Rating
 - Superior thermal performance
- Improves radiant heating systems performance
 - Excellent for Crawl Spaces
 - Seals tight around fasteners
- Use UL Approved HVAC Foil Tape
 - Certified ASTM testing





Environmentally Safe Products Inc.
 313 West Golden Ln. New Oxford, PA 17350
 Phone: 800-289-5693 Fax: (717)-624-7089
 E-Mail sales@low-e.com Web: www.low-e.com

ESP Low-E® HVAC Insulation Product Information

Product Identification:

| | |
|----------------|----------------------------|
| Product Name: | ESP Low-E® HVAC Insulation |
| Product Codes: | 4EFED, 5EFED |

Other Information:

| | |
|---|---|
| Finished Dimension: | Nominal 1/4" Thickness±10%, 48" Width x 125' Length, 60" Width x 100' Length (Standard); Shipped in roll form |
| Core Material: | Polyethylene |
| Facing: | 99.4% Polished Aluminum with reinforced scrim |
| Perm Rating: | ASTM E-96: 0.008 |
| Flame and Smoke: | ASTM E-84 Flame Spread: 5 Smoke Developed: 50 |
| R-Value: | ASTM C-518: (1/2" Space) R-6.41 |
| Emittance: | 0.03 |
| Install spacers every 24" to 36". Tape all seams with a U.L. 181 approved HVAC foil tape. | |

Notes and Warnings:

Warning: Although ESP Low-E® Insulation Products are all ASTM fire tested and have excellent fire ratings; it is recommended that they or any insulation material should not be exposed to open flame or other ignition sources of sufficient intensity during shipment, storage or installation.

Caution: Aluminum is an Electrical Conductor. Please use caution when working around electrical sources including overhead power lines.

Dealer Information

